


## Features

- 1 Pole 16 A relays for 125 °C ambient use**  
 - 45.71, 1 Pole normally open or normally closed  
 - 45.91, 1 Pole normally open ( $\geq 3$  mm contact gap)

PCB mount - coil connections  
 Faston 250 - contact connections

- Contact gap  $\geq 3$  mm according to EN 60730-1 (45.91 type)
- Sensitive DC coil - 360 mW
- Cadmium Free option available
- Reinforced insulation between coil and contacts according to EN 60335-1 (VDE 0700), with safe separation and 8 mm clearance and creepage distance
- 6 kV (1.2/50  $\mu$ s) isolation, coil-contacts
- Flux proof: RT II standard, (RT III option)

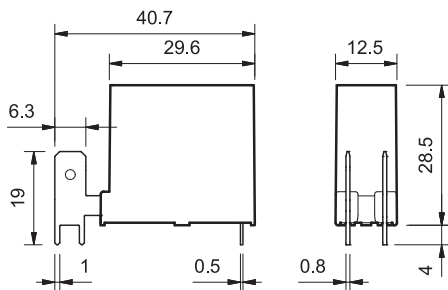


FOR UL HORSEPOWER AND PILOT DUTY RATINGS  
 SEE "General technical information" page V

### 45.71



- 1 NO or 1 NC (SPST-NO or SPST-NC)
- Max ambient temperature +125°C
- PCB mounting + Faston 250

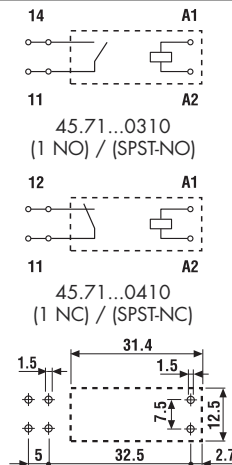


Copper side view

### 45.91



- 1 NO (SPST-NO),  $\geq 3$  mm gap
- Max ambient temperature +125°C
- PCB mounting + Faston 250




Copper side view

Contact specification			
Contact configuration		1NO or 1NC (SPST-NO or SPST-NC)	1NO (SPST-NO) $\geq 3$ mm gap
Rated current/Maximum peak current	A	16/30	16/30
Rated voltage/Maximum switching voltage V AC		250/400	250/400
Rated load AC1	VA	4,000	4,000
Rated load AC15 (230 V AC)	VA	750	750
Single phase motor rating (230 V AC)	kW	0.55	0.55
Breaking capacity DC1: 30/110/220 V	A	16/0.3/0.13	16/4/1
Minimum switching load	mW (V/mA)	500 (10/5)	500 (10/5)
Standard contact material		AgCdO	AgNi
Coil specification			
Nominal voltage ( $U_N$ )	V AC (50/60 Hz)	—	—
	V DC	6 - 12 - 24 - 48 - 60	6 - 12 - 24 - 48 - 60
Rated power AC/DC	VA (50 Hz)/W	—/0.36	—/0.36
Operating range	AC	—	—
	DC	$(0.7 \dots 1.2)U_N$	$(0.7 \dots 1.2)U_N$
Holding voltage	AC/DC	—/0.4 $U_N$	—/0.4 $U_N$
Must drop-out voltage	AC/DC	—/0.1 $U_N$	—/0.1 $U_N$
Technical data			
Mechanical life AC/DC	cycles	—/10 · 10 <sup>6</sup>	—/10 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	100 · 10 <sup>3</sup>	30 · 10 <sup>3</sup>
Operate/release time	ms	10/2	12/2
Insulation between coil and contacts (1.2/50 $\mu$ s)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1,000	2,500
Ambient temperature range	°C	−40...+125	−40...+125
Environmental protection		RT II	RT II
Approvals (according to type)			

## Ordering information

Example: 45 series for PCB relay + Faston 250, 1 NO (SPST-NO), 12 V DC coil.

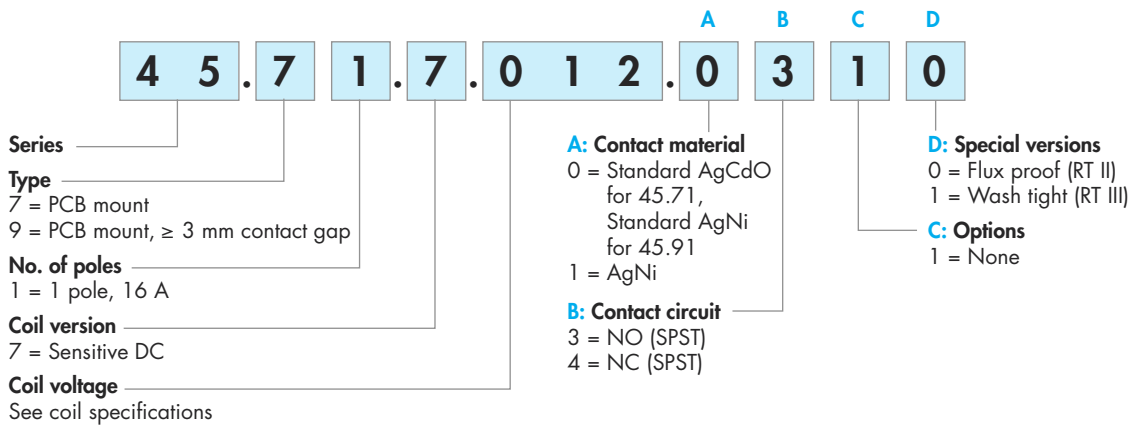

Selecting features and options: only combinations in the same row are possible.


Type	Coil version	A	B	C	D
45.71	sensitive DC	0 - 1	3 - 4	1	0 - 1
45.91	sensitive DC	0	3	1	0 - 1

## Technical data


Insulation according to EN 61810-1		45.71		45.91	
Nominal voltage of supply system	V AC	230/400		230/400	
Rated insulation voltage	V AC	250	400	250	400
Pollution degree		3	2	3	2
<b>Insulation between coil and contact set</b>					
Type of insulation		Reinforced (8 mm)		Reinforced (8 mm)	
Overvoltage category		III		III	
Rated impulse voltage	kV (1.2/50 $\mu$ s)	6		6	
Dielectric strength	V AC	4,000		4,000	
<b>Insulation between open contacts</b>					
Type of disconnection		Micro-disconnection		Full-disconnection	
Overvoltage category		—		III	
Rated impulse voltage	kV (1.2/50 $\mu$ s)	—		4	
Dielectric strength	V AC/kV (1.2/50 $\mu$ s)	1,000/1.5		2,500/4	
<b>Conducted disturbance immunity</b>					
Burst (5...50)ns, 5 kHz, on A1 - A2		EN 61000-4-4		level 4 (4 kV)	
Surge (1.2/50 $\mu$ s) on A1 - A2 (differential mode)		EN 61000-4-5		level 3 (2 kV)	
<b>Other data</b>		<b>45.71</b>		<b>45.91</b>	
Bounce time: NO/NC	ms	3/3		2/—	
Vibration resistance (10...150)Hz: NO/NC	g	20/10		20/—	
Shock resistance	g	20			
Power lost to the environment	without contact current	W	0.4		
	with rated current	W	1.8		
Recommended distance between relays mounted on PCB	mm	$\geq 5$			

## Contact specification


**F 45 - Electrical life (AC) v contact current**  
Type 45.71

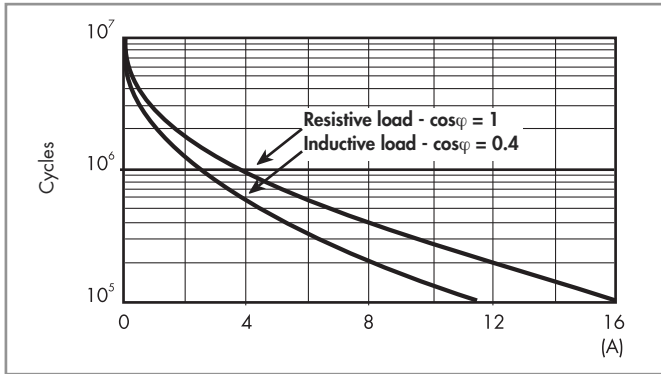

**F 45 - Electrical life (AC) v contact current**  
Type 45.91

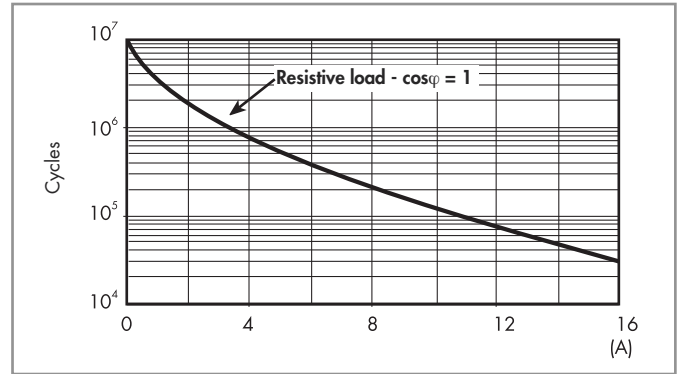

**H 45 - Maximum DC1 breaking capacity**

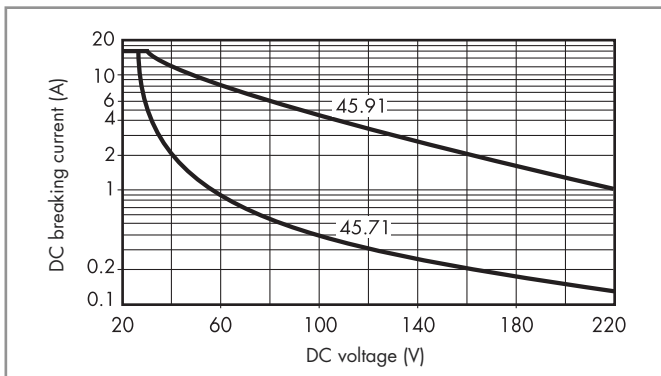


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 100 \cdot 10^3$  cycles (45.71) and  $\geq 30 \cdot 10^3$  cycles (45.91) can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.  
Note: the release time for the load will be increased.

## Coil specifications

**DC coil data - 0.36 W sensitive**

Nominal voltage $U_N$ V	Coil code	Operating range		Resistance R $\Omega$	Rated coil consumption I at $U_N$ mA
		$U_{min}$ V	$U_{max}$ V		
6	7.006	4.2	7.2	100	60
12	7.012	8.4	14.4	400	30
24	7.024	16.8	28.8	1,600	15
48	7.048	33.6	57.6	6,400	7.5
60	7.060	42	72	10,000	6

**R 45 - DC coil operating range v ambient temperature**

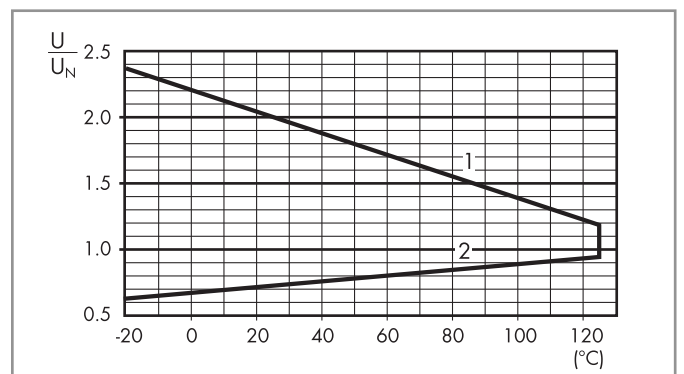

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

