DEGSON ELECTRONICS CO., LTD.

Product Specification

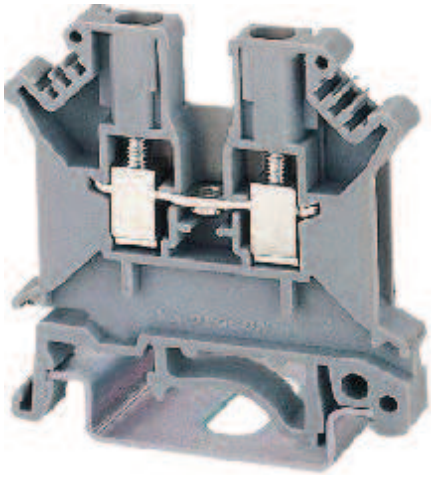

PC 2.5

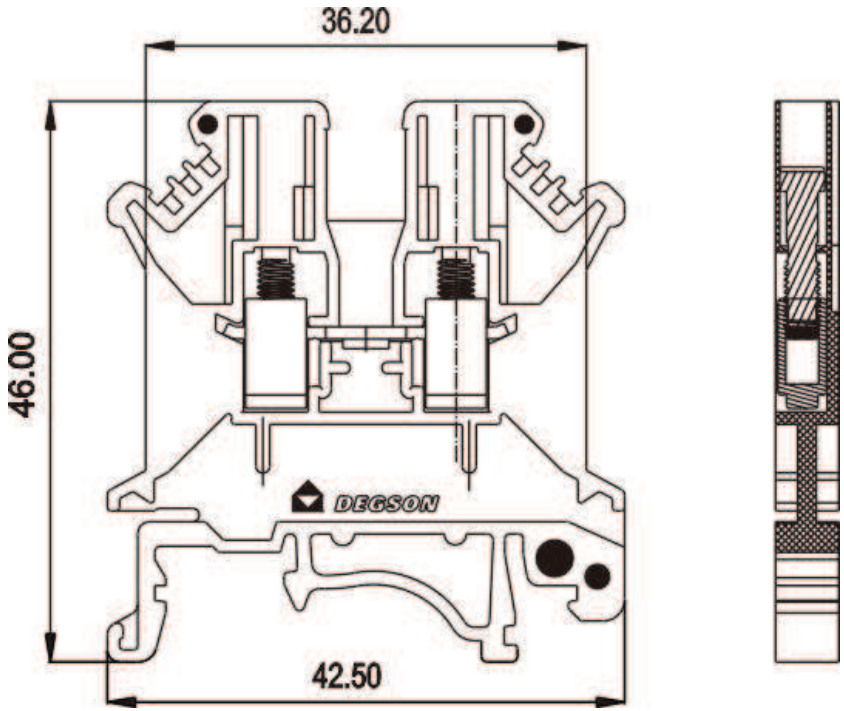

Approval	cULus	VDE
Capability		
Standard	**UL**	**IEC**
Rated Voltage	600V	800V
Rated Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/42.5/1.6mm	
Height(mm)(NS35:7.5/NS35:15/NS32)	42/54.5/52mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	7mm	
Screw thread/Tightening torque	M3/0.5N.m/4.5Lb-in	
Internal cylindrical gage	A3	
Insulating Material/Inflammability class	PA/V-0	

Specification	Model	Pieces
(1)Terminal block	PC 2.5	50
(2)End cover	D-PC 2.5	200
(3)Fixed bridge 2-P	FBRI 2-5	100
(3)Fixed bridge 3-P	FBRI 3-5	10
(3)Fixed bridge 5-P	FBRI 5-5	10
(3)Fixed bridge 10-P	FBRI 10-5	10
(4)Step bracket		
(5)Insertion bridge 2-P	EB 2-5	150
(5)Insertion bridge 3-P	EB 3-5	150
(5)Insertion bridge 10-P	EB 10-5	50
(6)Isolator bridge bar,10P		
(7)Bridge bar isolator		
(8)Switching bridge		
(9)Separating plate	TS-K	1000
(10) Separating plate, width 1.5mm	ATP-PC	50
(11)Test plug socket	DSB 3/10/4	100
(12)Test plug socket, insulated	DSBJ 3/13/4	100
(13)Zack strip	ZB5	300

HOW TO ORDER :

[ ] – [ ][ ] P — [1][ ] — [X][X][X] Customer Request

Series No.

No. of pole

Color

1	Gray	4	Green	7	Transparent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	white

mm (INCH)

THIROANGLE PROJECTION

DEGSON ELECTRONICS CO., LTD.

NAME

PC 2.5